

B15 FEMALE HEADER (1.27mm * 2.54mm)

PROFILE : 4.6mm STRAIGHT

PITCH: 1.27mm

SPECIFICATIONS

Material

Insulator : Nylon 6T, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

Electrical

Current Rating : 1 Amp


Contact Resistance : 30 mΩ max.

Insulation Resistance : 1000 MΩ min.







Dielectric Withstanding Voltage : 250V AC for 1minute

Operating Temperature : -40°C to +105°C


♦ Mating Suggestion : C13, C13a, C14 & C14a series.

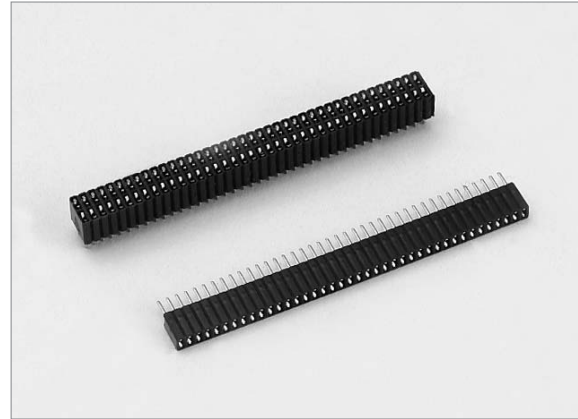

B

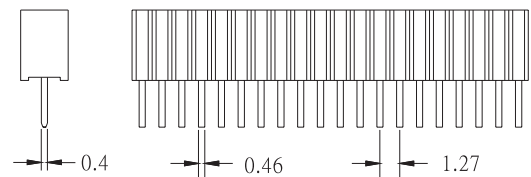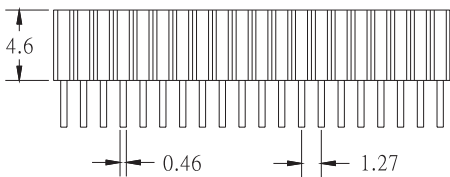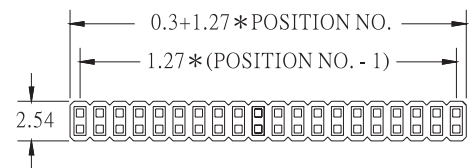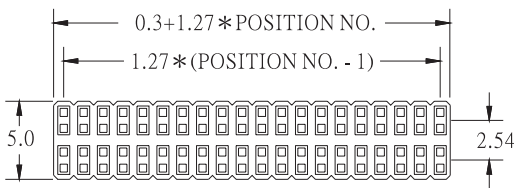

RECOMMENDED P.C.B. LAYOUT



RECOMMENDED P.C.B. LAYOUT

HOW TO ORDER:

B15 - 1 - 2 - 3 - 4

| 1.NO. OF CONTACT | 2.CONTACT MATERIAL | 3.CONTACT PLATING | 4.INSULATOR COLOR |
|--|--------------------|---|-------------------|
| SINGLE ROW 1*2 - 1*50 DUAL ROW 2*2 - 2*50 | B: PHOSPHOR BRONZE | T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD | 1. BLACK |