

# D14a

## DIN 41612 (TRIPLE ROW) PRESS-FIT TYPE




1.NO. OF CONTACT 64 96	2.CONTACT TYPE M: MALE F : FEMALE A: MALE WITH BOARDLOCK B: FEMALE WITH BOARDLOCK
3.CONTACT PLATING S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	4.MOUNTING TYPE A: STRAIGHT
5.TYPE OPTION A: C TYPE (LONG BODY) C: R TYPE (LONG BODY)	6.TERMINAL INSERTED OPTION A: TRIPLE ROW (A + B + C) B: DUAL ROW (A + B) C: DUAL ROW (A + C) D: DUAL ROW (B + C)
7.LEAD LENGTH A: 4.6mm B: 13.0mm C: 17.0mm	8.INSULATOR COLOR 2. GREY

### HOW TO ORDER:

D14a -  1 -  2 -  3 -  4 -  5 -  6 -  7 -  8

# D14b

## DIN 41612 (TRIPLE ROW) WIRE WRAPPING TYPE

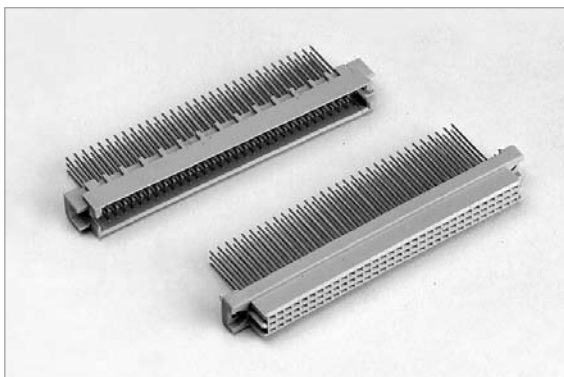

1.NO. OF CONTACT 64 96	2.CONTACT TYPE M: MALE F : FEMALE A: MALE WITH BOARDLOCK B: FEMALE WITH BOARDLOCK
3.CONTACT PLATING S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	4.MOUNTING TYPE A: STRAIGHT
5.TYPE OPTION A: C TYPE (LONG BODY) C: R TYPE (LONG BODY)	6.TERMINAL INSERTED OPTION A: TRIPLE ROW (A+B+C) B: DUAL ROW (A+B) C: DUAL ROW (A+C) D: DUAL ROW (B+C)
7.LEAD LENGTH A: 13.0mm B: 17.0mm	8.INSULATOR COLOR 2. GREY

### HOW TO ORDER:

D14b -  1 -  2 -  3 -  4 -  5 -  6 -  7 -  8