






E03

HIGH DENSITY D - SUB PCB RIGHT ANGLE

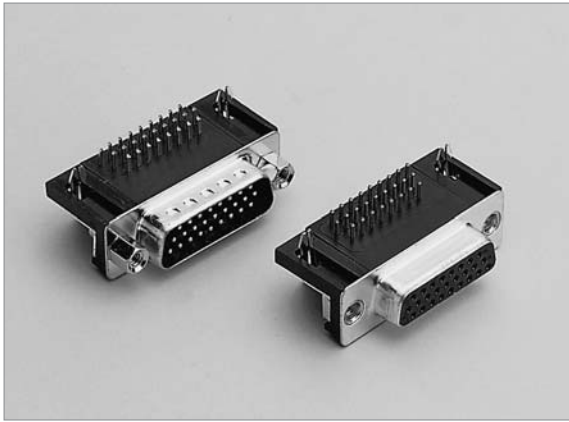





POSITION	A	B	C	D	E
15F	16.30	25.00	30.8	2.29	1.145
26F	24.60	33.30	39.2	2.29	1.145
44F	38.30	47.10	53.1	2.29	1.145
62F	54.80	63.50	69.4	2.41	1.205

POSITION	A	B	C	D	E
15M	16.92	25.00	30.8	2.29	1.145
26M	25.25	33.30	39.2	2.29	1.145
44M	38.96	47.10	53.1	2.29	1.145
62M	55.42	63.50	69.4	2.41	1.205

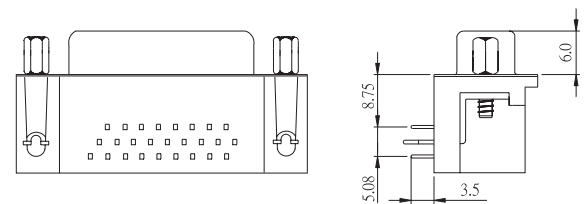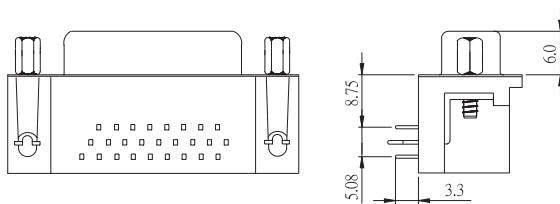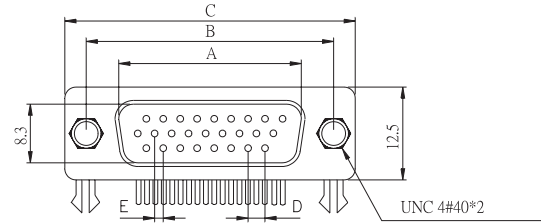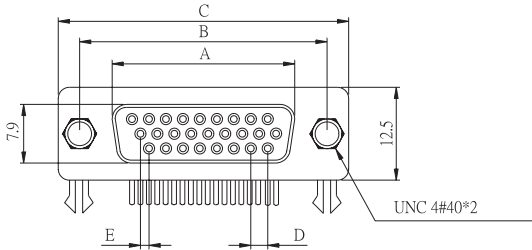

FEMALE

MALE

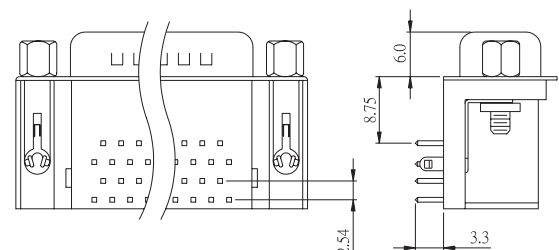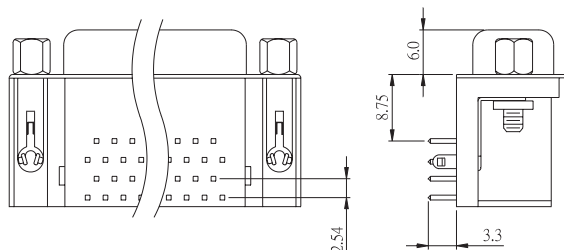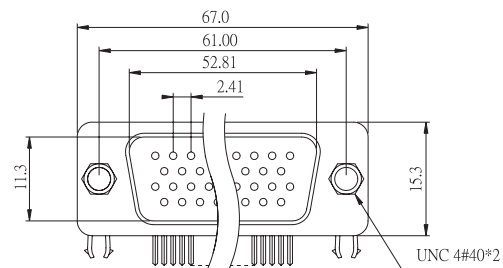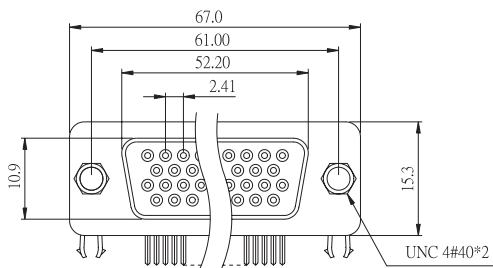

78 POSITION FEMALE


78 POSITION MALE




E03

HIGH DENSITY D - SUB PCB RIGHT ANGLE


PROCESS OPTION




W/RIVET ONLY




W/BOARDLOCK
SCREW FIXED




W/NON-THREAD L-SHAPE
SCREW FIXED




RIVET W/NON-THREAD
L-SHAPE SCREW FIXED




RIVET W/BOARDLOCK
SCREW FIXED



RIVET W/BOARDLOCK



RIVET W/NON-THREAD L-SHAPE



RIVET W/4-PRONG BOARDLOCK

HOW TO ORDER:

E03 - - - - - - - -

1.NO. OF CONTACT	2.CONTACT TYPE	3.CONTACT PLATING	4.SHELL PLATING
15 26 44 62 78	M: MALE F: FEMALE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	T: TIN N: NICKEL P:TIN + DIMPLE Q: NICKEL +DIMPLE Z: ZINC (CHROMATIC)
5.MOUNTING METHOD	6.ACCESSORIES	7.SPECIAL OPTION.	8.INSULATOR COLOR
A: BOARDLOCK (Z - SHAPE) B: RIVET W/BOARDLOCK (Z - SHAPE) C: RIVET ONLY D: NON - THREAD L - SHAPE E: RIVET W/NON - THREAD L - SHAPE F: 4#40 THREAD L - SHAPE G: RIVET W/4#40 THREAD L - SHAPE T: 4 - PRONG BOARDLOCK U:RIVET W/4 - PRONG BOARDLOCK	A: NON ACCESSORIES B: ADD SCREW (4.8 * 11.8) C: FIX SCREW (4.8 * 11.8) D: ADD SCREW (5.8 * 12.0) E: FIX SCREW (5.8 * 12.0)	A: STANDARD TYPE B: EMI TYPE	1. BLACK