

# L04b

## 2.5mm & 2.54mm RAINBOW FLAT RIBBON CABLE

UL File No. : E162690

UL Style : 2651

Operating Temperature : -20°C to +105°C

Flammability Rating : UL-VW-1

Voltage Rating : 300V

### Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #28 AWG (7\*0.127) Stranded Tinned Copper

#26 AWG (7\*0.16) Stranded Tinned Copper

Color : Brown, Red, Orange, Yellow, Green, Blue, Violet, Grey, White, Black 10 Color Repeat

### Electrical


Impedance : 120Ω (Unbalanced)

Capacitance : 11.2pF/ft.

Inductance : .14 μH/ft

Propagation Delay : 1.35 ns/ft.

Insulation Resistance : 1GΩ/M min.

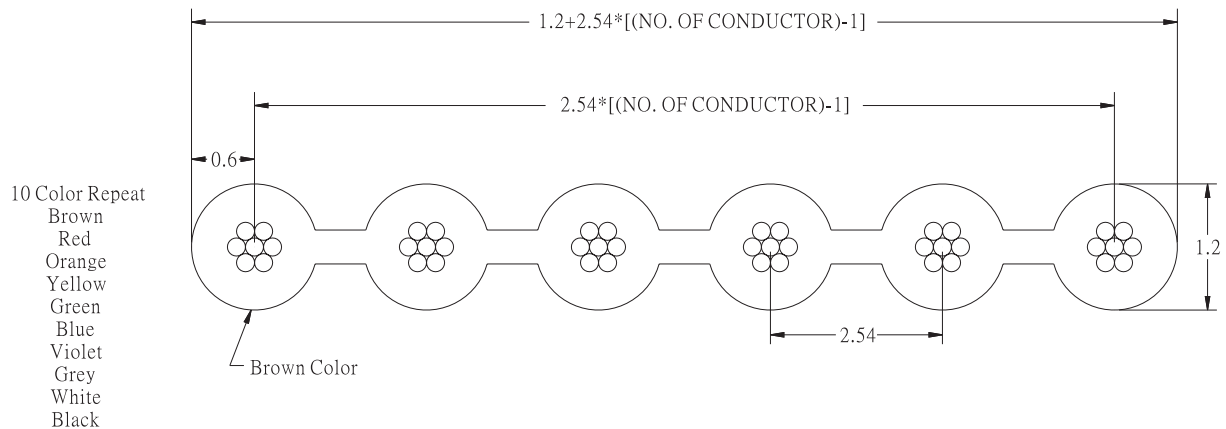

### HOW TO ORDER:

L04b -  -  -  -  - /UNIT

1.NO. OF CONDUCTOR	2.INSULATION MATERIAL	3.PTICH OPTION	4.WIRE SIZE	4.CABLE LENGTH / UNIT
03 TO 36	P: PVC	A: 2.54mm B: 2.5mm	A: 28AWG B: 26AWG	C: CM F: FEET I: INCH M: METER